

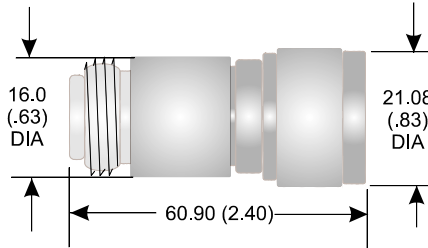
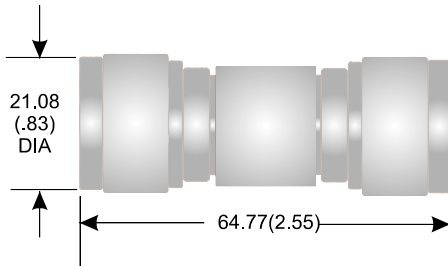


DC BLOCK

MODEL WA8046

10 MHz – 18.0 GHz

200 VOLTS

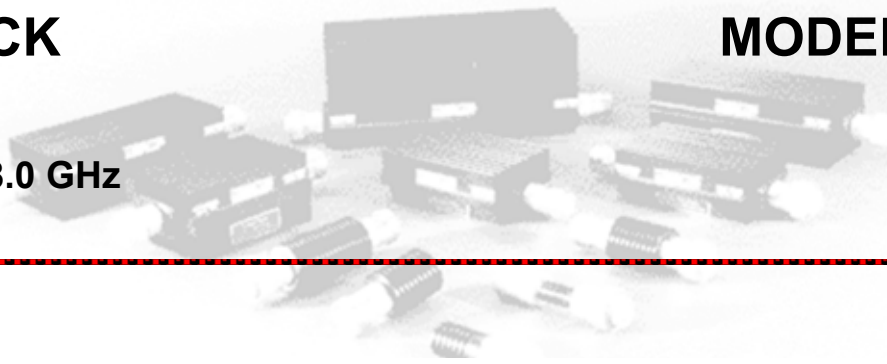

Voltage: 200 volts

Temperature Range: -65°C to + 125°C

Connectors: N M/F connectors per MIL-STD-348 Interface dimension mate nondestructively with MIL-C-39012 connectors.

Construction: Stainless steel body with stainless steel connectors with gold plated beryllium copper female contact and stainless steel male contact.

Features

Inner Only - 18.0 GHz N DC Block

Specifications

Nominal Impedance: 50 ohms

Frequency Range: 10 MHz to 18.0 GHz

Maximum VSWR: 1.50

Maximum Insertion Loss: 0.8 dB

Frequency GHz	Insertion Loss (dB)	VSWR (Max)
0.01—1.0	0.25	1.20
1.0—4.0	0.50	1.30
4.0—8.0	0.80	1.40
8.0—18.0	0.80	1.50

Physical Dimensions:

Model	Connectors	Length	Wt
8046-34	Male – Female	44.7 (1.76)	
8046-33	Female – Female	Call	N/A
8046-44	Male - Male	Call	N/A



WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

Email: sales@WeinschelAssociates.com

Version 1.0.1

Specification
Subject to
change without
notice