



| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | | | | |

SPECIFICATIONS


FREQUENCY RANGE: DC TO 26.5 GHz
 VSWR: 1.25:1 MAX
 POWER (AVG): 2 W MAX, DERATES LINEARLY TO 0.2 W AT 125 C
 POWER (PEAK): 500 W MAX (5 MICROSECOND PW, 0.2% DUTY CYCLE)
 IMPEDANCE: 50 OHMS, NOMINAL

OPERATING TEMPERATURE RANGE: -55 C TO +125 C

MATERIALS:

BODY AND COUPLING NUT: STAINLESS STEEL
 CONTACT: GOLD PLATED PER MIL-G-45204
 INSULATOR: TEFLON

RoHs COMPLIANT

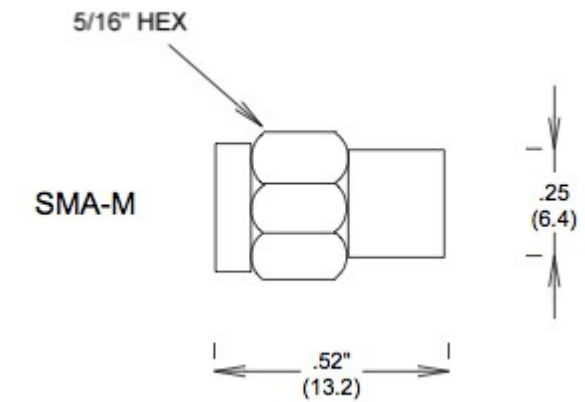

| | | | | | | |
|---|-------------------|------------------|--|--|---------|-----------------|
| DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED | DRAWN D. HEFT | DATE 06/12/18 | WEINSCHEL ASSOCIATES 2505 BACK ACRE CIRCLE MOUNT AIRY, MD 21771 | | | |
| | CHECKED | | | | | |
| | MAT'L: SEE NOTES | QA | | TERMINATION, 18 GHZ, SMA(M) STAINLESS STEEL, WA1409-2 | | |
| | FINISH: SEE NOTES | MFG | | | | |
| | APPROVED | | SIZE B | FSCM NO. 0H3E9 | DWG NO. | REV 1 |
| | | | SCALE NONE | | | SHEET 1 OF 1 |

PROPERTY OF nVISION INDUSTRIES, INC, COMPANY CONFIDENTIAL

