

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.25:1 MAX
PIM; 160dbc typ for 2 carriers @ 20W

MECHANICAL

MATERIALS 7/16 BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACTS SI PLATING
RECOMMENDED TORQUE 7-16 221 IN-LBS
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL PER DIN 47223
OPERATING TEMP: -45 TO +80 DEG C

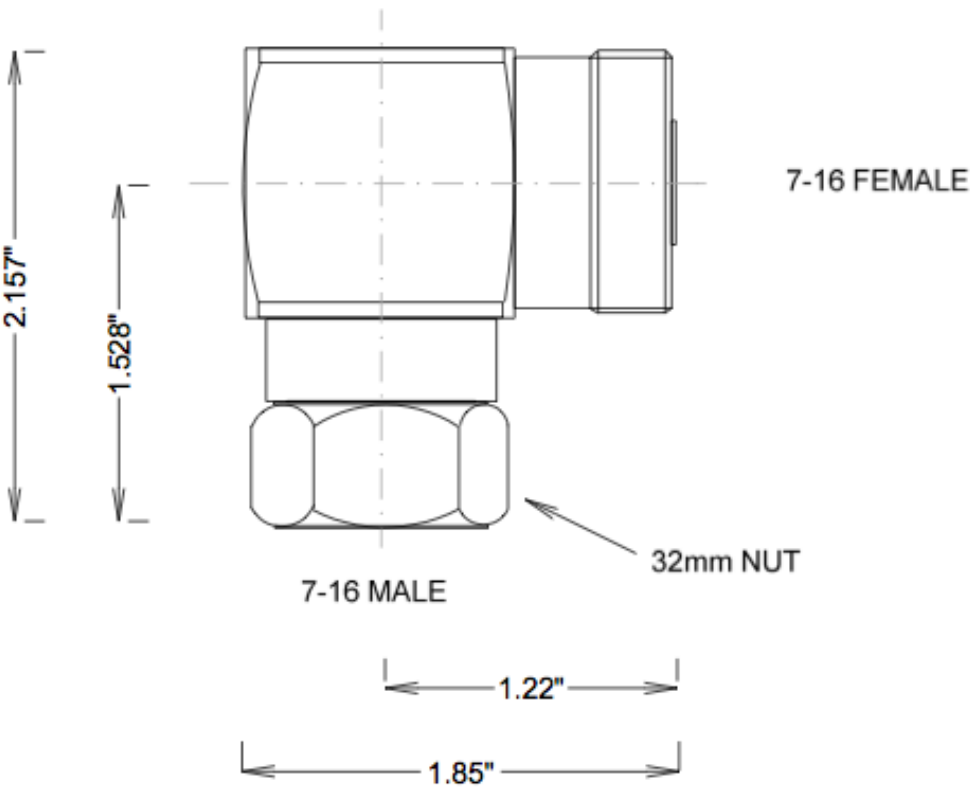

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN D. HEFT	DATE 3/7/11	WEINSCHEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879		
	CHECKED		ADAPTER, 7/16 DIN, RIGHT ANGLE MALE-FEMALE		
	QA				
	MFG		SIZE B	FSCM NO. 0H3E9	DWG NO. WA1516-78R
MAT'L: SEE NOTES	APPROVED		SCALE NONE		REV
FINISH: SEE NOTES			SHEET 1 OF 1		