

SPECIFICATIONS





ELECTRICAL

FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.15:1 MAX
PIM; 160dbc typ for 2 carriers @ 20W

MECHANICAL

MATERIALS BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACTS SI PLATING
RECOMMENDED TORQUE 7-16 221 IN-LBS
DURABILITY: 500 CYCLES MIN

OPERATING TEMP: -55° TO +125° C

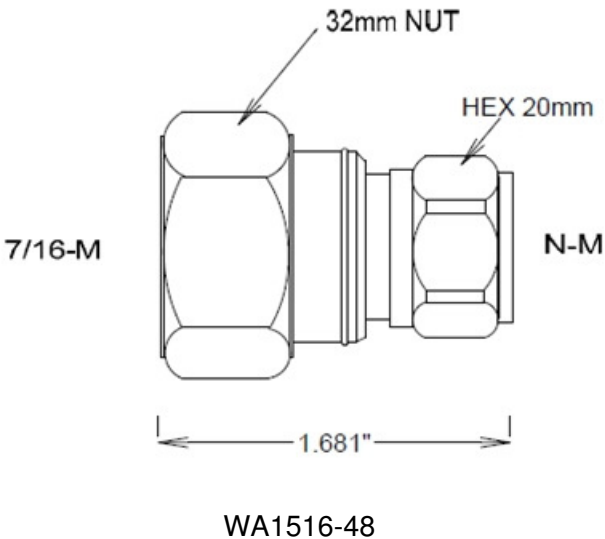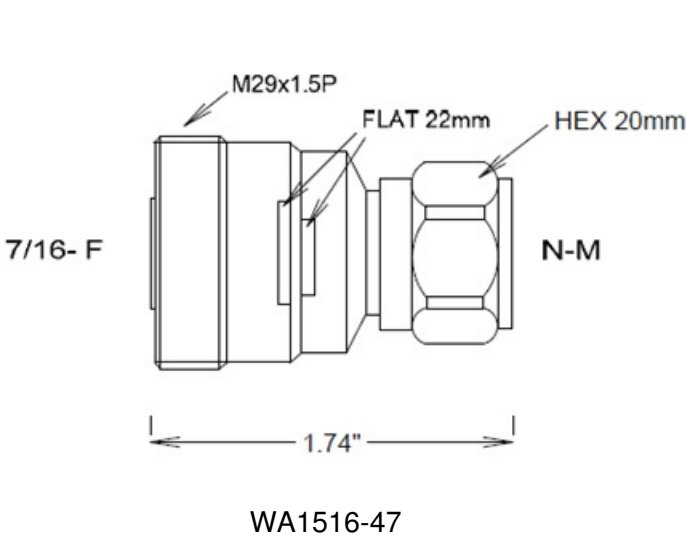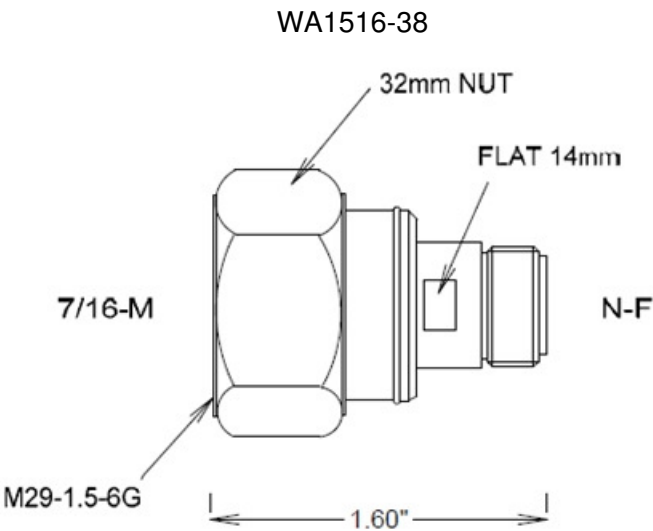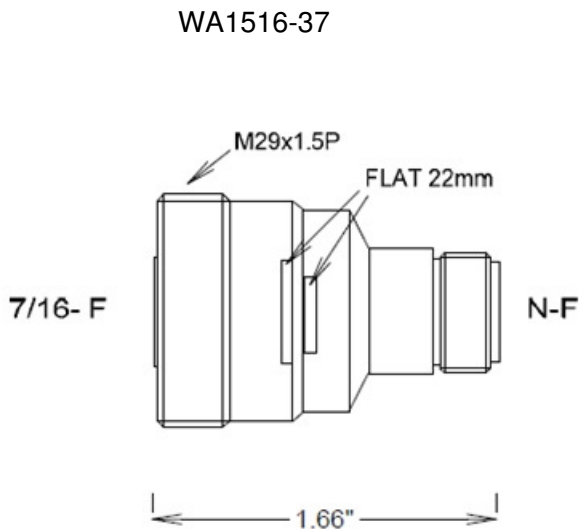

DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN D. HEFT	DATE 5/7/09	WEINSCHTEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879			
	CHECKED		ADAPTER, N to 7/16 DIN WA1516			
	QA					
	MFG		SIZE B	FSCM NO. 0H3E9	DWG NO.	REV
	APPROVED		SCALE NONE		SHEET 1 OF 1	