

Notes:

1. Material and Finish:

Housing: Black Anodized Aluminum Alloy

Connectors: Passivated Stainless Steel Bodies, Gold-plated Beryllium Copper Contacts

2. Electrical Specifications:

Frequency Band (GHz): DC - 4

Attenuation (dB): 3 to 40 dB

VSWR: 1.2:1, maximum



Impedance: 50 ohms, nominal

Average Power at 25 C: 100 W

Power Derating (-20 C to +125 C): 100 W to 2.5 W

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED

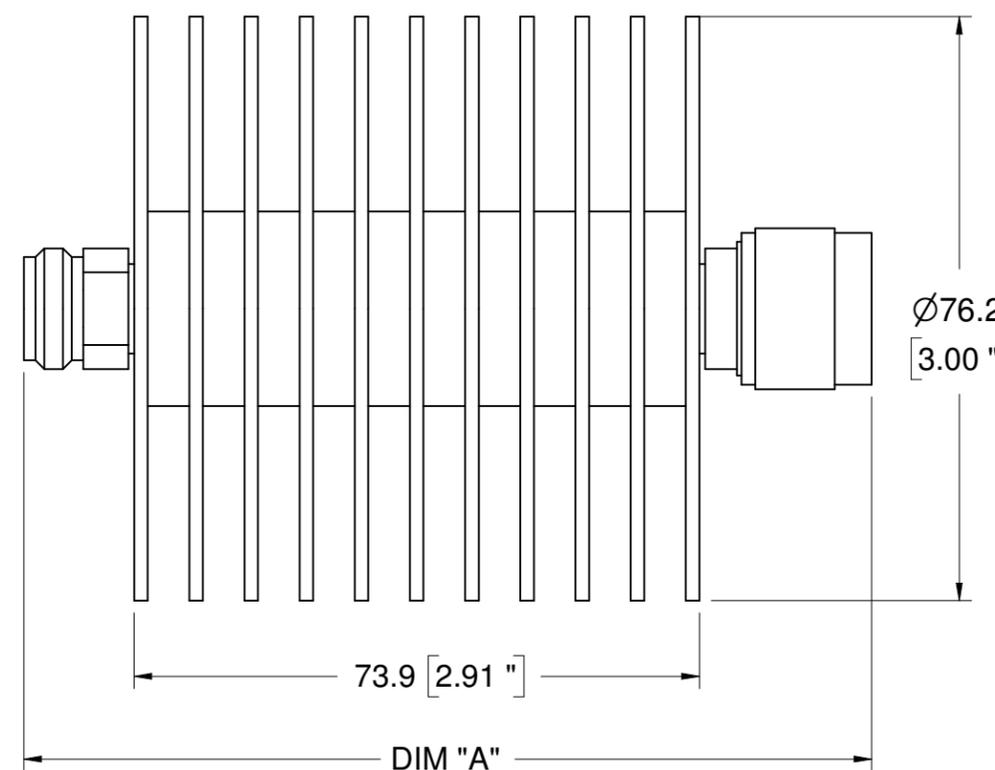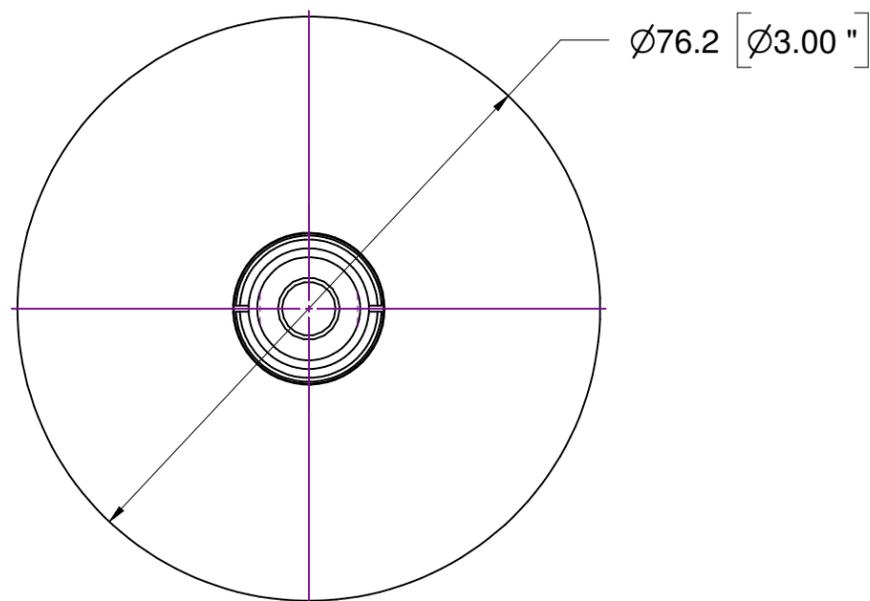

APPLICATION		DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN	DATE	COMPANY
USED ON	NEXT ASSY			DMH	
			CHECKED		
			QA		TITLE WA26-xx-34 OUTLINE DRAWING
			MFG		
		MAT'L: N/A	APPROVED		SIZE B
		FINISH: N/A			FSCM NO. 0H3E9
					DWG NO. B
					REV -
					SCALE 1:1
					SKETCH DWG NO:
					SHEET 1 OF 1