


SPECIFICATIONS


ELECTRICAL
FREQUENCY: DC - 18 GHz
IMPEDANCE: 50 Ohms
VSWR: 1.15:1 MAXIMUM

MECHANICAL
MATERIAL BODY: PASSIVATED STAINLESS STEEL
MATERIAL CONTACTS: Au PLATED BERYLIUM COPPER


ENVIRONMENTAL
DURABILITY: 500 CYCLES
OPERATING TEMPERATURE: -60 TO +165 C

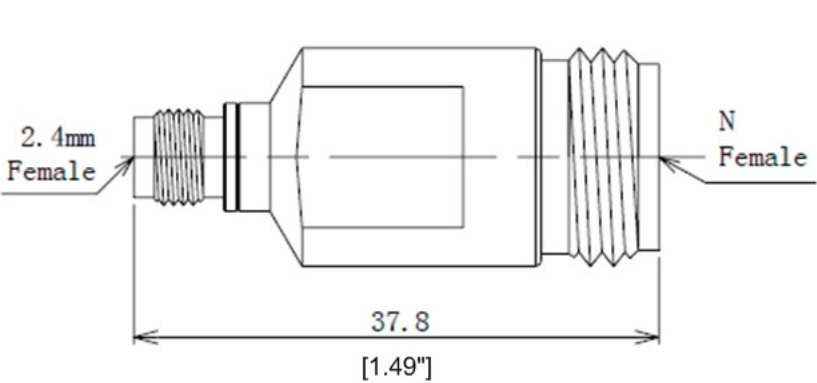


WA7012-13

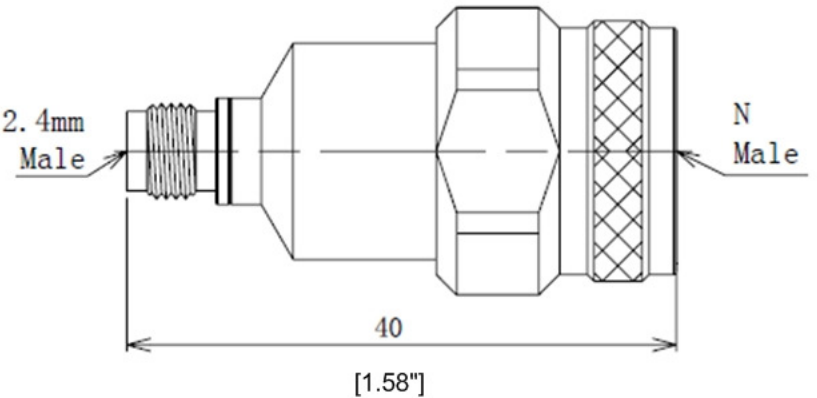

WA7012-14

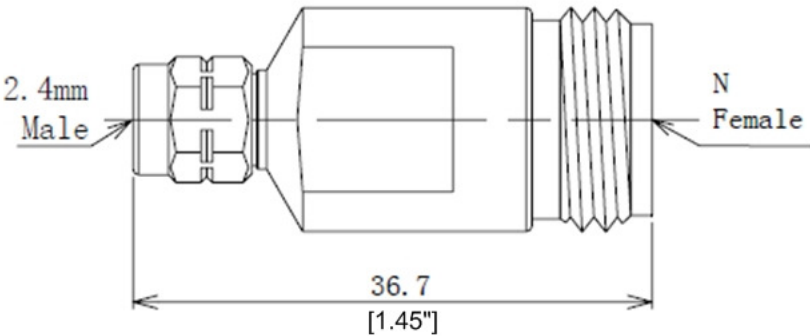

WA7012-23

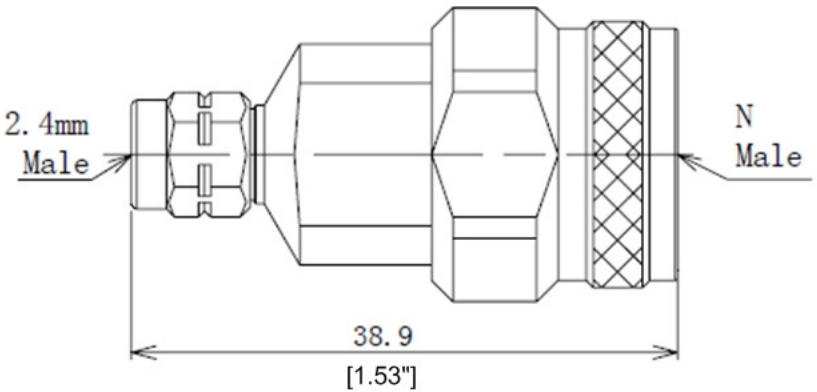

WA7012-24

DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED		DRAWN D. HEFT	DATE 5/7/09	WEINSCHEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879		
		CHECKED				
		QA		ADAPTER, N-2.4mm WA7012		
		MFG				
MAT'L: AL ALLOY 6061-T6		APPROVED		SIZE B	FSCM NO. 0H3E9	DWG NO.
FINISH: SEE NOTES				SCALE NONE		REV
						SHEET 1 OF 1