

Precision Coaxial Adapter

WA1516

DC – 6 GHz

Type N to 7/16 DIN



Features

Type N and 7/16 DIN stainless steel M/F connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 6 GHz

Temperature Range: -55°C to +125°C


Construction: Passivated stainless steel body and gold plated beryllium copper contacts. RoHS Compliant.

Maximum VSWR:

Frequency (GHz)	VSWR
	WA1516
DC - 6 GHz	1.2

Dimensions:

Note: Dimensions are given in inches unless otherwise specified. Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.

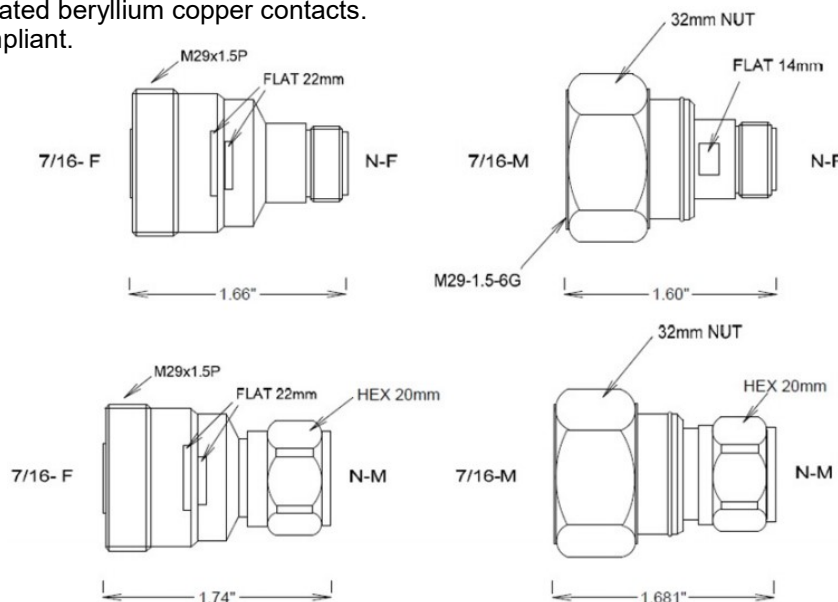

WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com

