


Precision Coaxial Adapter

WA7010

DC – 27.0 GHz

2.92 mm to SMA

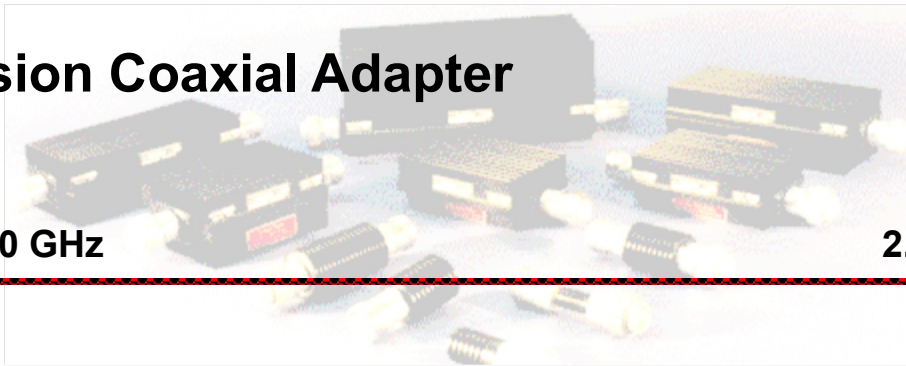

Features

2.92 mm and SMA M/F connectors per MIL-STD -348A, interface dimensions mate non-destructively with MIL-PRF-39012 connectors. Designed to meet MIL-DTL-3933 environmental specification.

Maximum VSWR:

Frequency (GHz)	VSWR
DC - 27.0	1.20

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 27.0 GHz

Power: Up to 10 W

Temperature Range: -55°C to +100°C

Construction: Stainless steel bodies and gold plated beryllium copper contacts. RoHS Compliant.

Dimensions:

Note: Dimensions are given in inches unless otherwise specified. Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.

