


Precision Coaxial Adapter

WA7014

DC – 33.0 GHz

2.92 mm to 3.5 mm

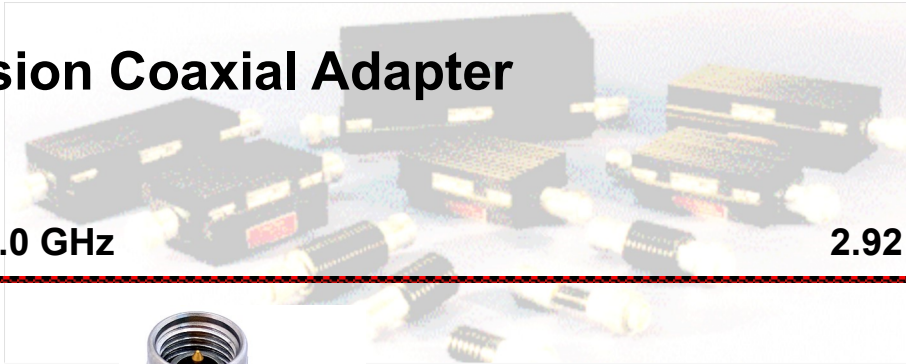

Features

2.92 mm and 3.5 mm M/F connectors per MIL-STD-348A, interface dimensions mate non-destructively with MIL-PRF-39012 connectors. Designed to meet MIL-DTL-3933 environmental specification.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 33.0 GHz

Temperature Range: -55°C to +100°C





Construction: Stainless steel bodies and gold plated beryllium copper contacts. RoHS Compliant.

Maximum VSWR:

Frequency (GHz)	VSWR
	WA7014
DC - 33.0	1.15

Dimensions:

Note: Dimensions are given in mm (in) unless otherwise specified. Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.

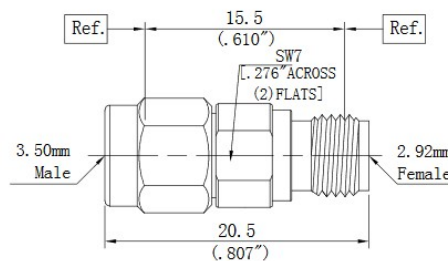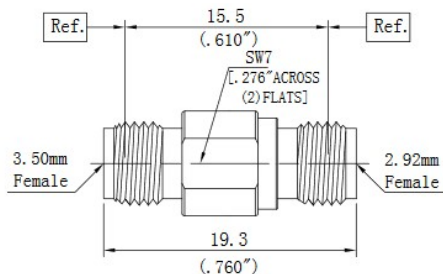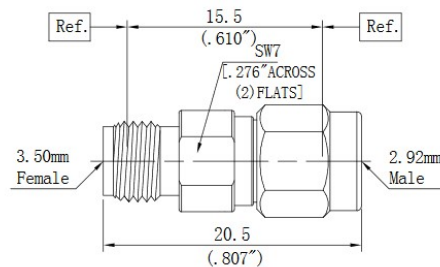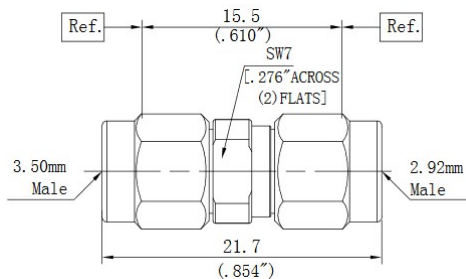

WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com

