


# Fixed Coaxial Attenuator

# WA1W & WA2W

WA1W/6: DC – 6.0 GHz  
 WA1W: DC – 12.4 GHz  
 WA2W: DC – 18.0 GHz

**2 WATTS**

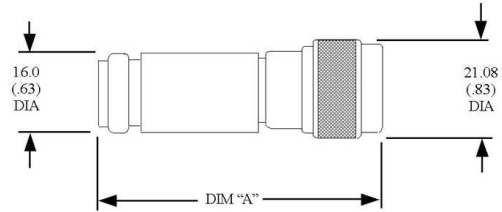

## Features

Type N stainless steel M/F connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification.

## Specifications

**Nominal Impedance:** 50 ohms.

**Frequency Range:** WA1W/6: DC - 6 GHz.  
 WA1W: DC - 12.4 GHz.  
 WA2W: DC - 18.0 GHz.

**Nominal dB Values:** 1 - 60 dB

**Power Coefficient:** <0.005 dB/dB/W. Bidirectional in power.

**Power Rating:** 2 W average. Maximum rated average power to 25°C ambient temperature, de-rated linearly to 0.5 W at 125°C. 1 kW peak (5 µsec pulse width; 0.1% duty cycle).

**Temperature Range:** -55°C to +125°C.

**Temperature Coefficient:** < 0.0004 dB/dB/°C.

**Construction:** Passivated stainless steel body and connectors, gold plated beryllium copper contacts. RoHS Compliant.

**Calibration:** Insertion Loss and VSWR performed across frequency range. Calibration test data available at additional cost.

## Standard Nominal Values and Deviations:

Attenuation (dB)	Accuracy ± dB		
	WA1W/6	WA1W	WA2W
1 to 2	0.4	0.4	0.5
3 to 9	0.3	0.3	0.3
10 to 20	0.5	0.75	0.5
21 to 40	0.75	1.0	1.0
41 to 50	0.75	1.0	1.25
51 to 60	1.0	N/A	1.5

## Maximum VSWR:

Frequency (GHz)	VSWR		
	WA1W/6	WA1W	WA2W
DC - 4.0	1.15	1.15	1.15
4.0 - 8.0	1.2	1.2	1.2
8.0 - 12.4	N/A	1.25	1.25
12.4 - 18.0	N/A	N/A	1.4

## Weight (All Models):

01-30 dB      70 (2.6)  
 31-60 dB      100 (3.6)

## Dimensions:

Attenuation (dB)	Dim "A"
1 – 30	57.2 (2.25)
31 – 60	67.4 (2.65)

**Diameter:** 16.0 (0.63).

*Note: Dimensions are given in mm (in), or kg (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.*