


# Broadband Resistive Power Divider WA1574-2

DC - 26.5 GHz

1 WATT

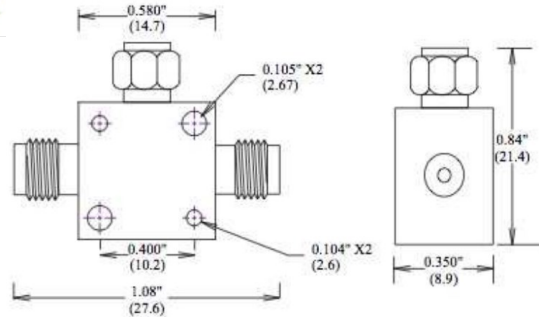

## Features

Male 3.5mm port 1, (2) female 3.5mm ports 2 and 3; all ports -mate non-destructively with other SMA, 2.92mm and 3.5mm connectors. Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position.

Lightweight miniature package with high power capability.

## Specifications

**Nominal Impedance:** 50 ohms.

**Frequency Range:** DC - 26.5 GHz

**Power Coefficient:** < 0.005 dB/dB/W.

**Power Rating:** 1 W maximum average rated power to 25°C ambient temperature. 1 kW peak power (5 µsec pulse width, 0.05% duty cycle).

**Temperature Range:** -55°C to +85°C.

**Temperature Coefficient:** < 0.004 dB/dB/°C.

**Construction:** Nickel plated brass body; stainless steel connectors; gold plated beryllium copper contacts. RoHS Compliant.

**Phase Tracking:** < 2°

**Insertion Loss:** 6 dB nominal, 8.5 dB maximum (between input and either output).

## Maximum Amplitude Tracking:

Frequency Range (GHz)	Tracking (dB)
	WA1574-2
DC - 26.5	< 1.0

## Maximum VSWR:

Frequency (GHz)	VSWR
	WA1575
DC - 26.5	1.7

## Dimensions:

Weight:	0.01 (1.76)
Length:	29.00 (1.14)
Width:	9.00 (0.35)
Height:	22.00 (0.87)

*Note: Dimensions are given in mm (in), or g (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.*