

NOTES:

1. Material and Finish:

Housing: Aluminum Alloy painted with High-Temperature Black Paint
Connectors Passivated Stainless Steel Bodies, Gold Plated Beryllium Copper Contacts.

2. Electrical Specifications:

Frequency Band: DC-2.5 GHz, Usuable to 3GHz

Attenuation (dB): 20, 30, and 40 dB

VSWR: 1.35:1 maximum



Impedance: 50 Ohms, nominal

Average Power at 25° C: 2000W, Unidirectional


Power Derating(+25° C to +125° C): Derated to 100W at +125° C

3. Marking: Label to indicate "INPUT" And " OUTPUT" Ports

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

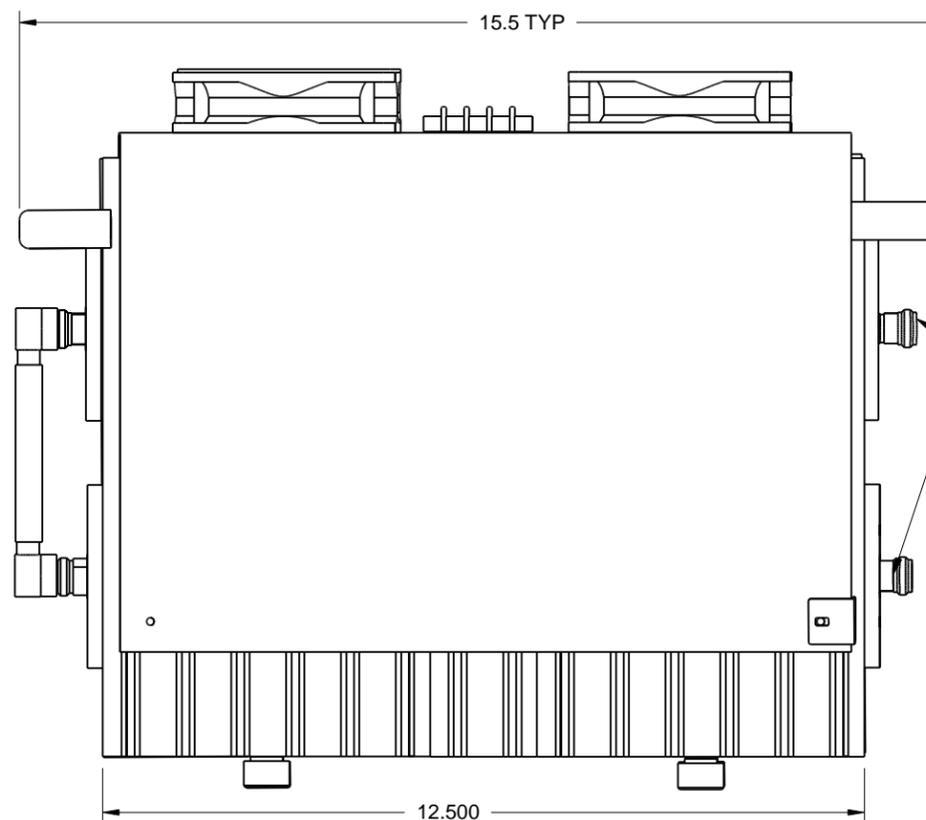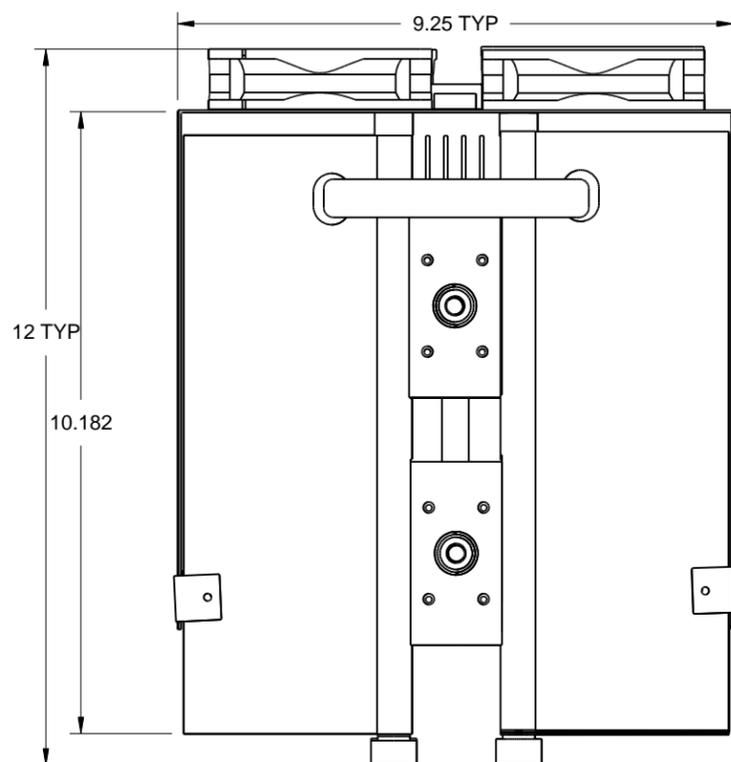

N-TYPE OR 7/16 DIN (MALE OR FEMALE)
CONNECTORS CUSTOMER SPECIFIED

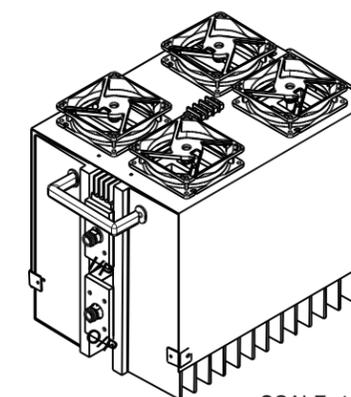

SCALE: 1:8

PROPERTY OF nVISION INDUSTRIES, INC, COMPANY CONFIDENTIAL

DIMENSIONS IN INCHES 3PLCS ± .003 2 PLCS ± .01 FRACTIONS ± 1/64 ANGLES ± 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN	DATE	WEINSCHel ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879			
	BKS	6-16-15				
	CHECKED		OUTLINE DRAWING: 2KW ATTENUATOR FINAL ASSY			
	QA					
MATERIAL: SEE NOTES	MFG		SIZE	FSCM NO.	DWG NO.	REV
FINISH: SEE NOTES	APPROVED	DMH	B	0H3E9	B210680	1
		6-18-15	SCALE		SHEET	
			AS SPECIFIED		1 OF 1	