
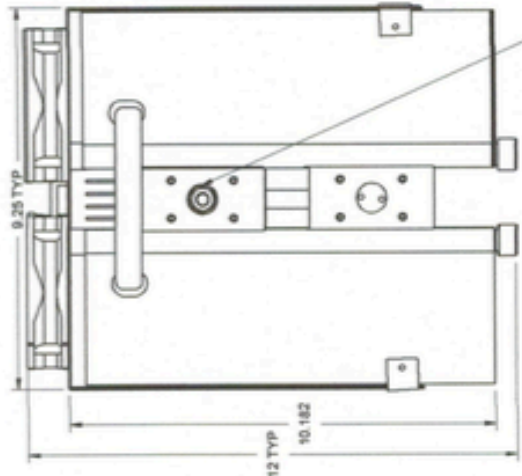


NOTES:

1. Material and Finish:
Housing: Aluminum/Alloy painted with High-Temperature Black Paint
Connectors: Passivated Stainless Steel Bodies, Gold Plated Beryllium Copper Contacts.
2. Electrical Specifications:
Frequency Band: DC-3.0 GHz.
VSWR: 1.35:1 maximum
Impedance: 50 Ohms, nominal
Average Power at 25 C: 2000W
Power Derating(+25 C to +125 C): Derated to 100W at +125 C
3. Marking: Label to indicate "INPUT" Ports

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

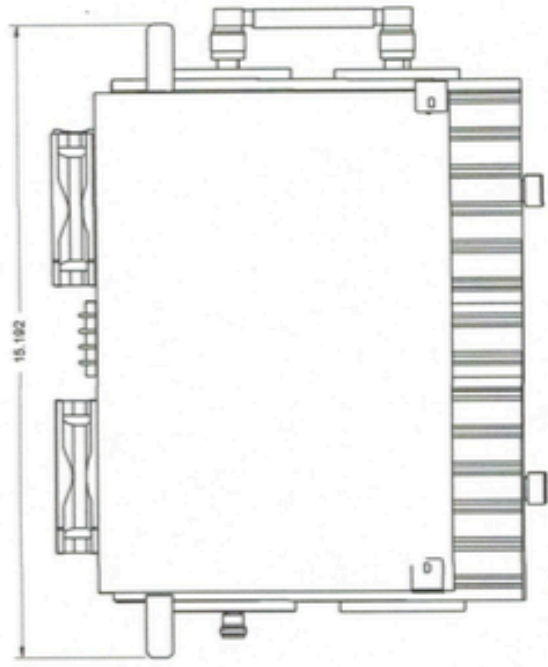

scale: 1:3

N-TYPE OR 7/16 DIN (MALE OR FEMALE) CONNECTORS CUSTOMER SPECIFIED

scale: 1:8

DIMENSIONS IN INCHES 3 PLCS ± .003 2 PLCS ± .01 FRACTIONS ± 1/64 ANGLES ± 1/2 DEG UNLESS OTHERWISE SPECIFIED	DATE 6-29-15	DRIVER BKS	WEINSCHTEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879
MATERIAL: SEE NOTES	APPROVED <i>[Signature]</i>	SIZE / PFCM NO. B / 0H3E9	SCALE AS SPECIFIED
FINISH: SEE NOTES	FINISH: 6-2-15	DWG NO. B200671	REV 1
PROPERTY OF INVISION INDUSTRIES, INC., COMPANY CONFIDENTIAL			SHEET 1 OF 1