SPECIFICATIONS:

FREQUENCY RANGE: DC-40 GHZ

NOMINAL IMPEDANCE: 50 OHMS

NOMINAL ATTENUATION VALUES: (3,6,10,20,30)dB

POWER SENSITIVITY: < 0.005 dB/dB/W;

POWER RATE: 10 WATTS AVERAGE UNIDIRECTIONAL. MAXIMUM RATED AVERAGE POWER WITH CASE TEMPERATURE HELD TO A MAXIMUM OF 90°C. 200 WATTS PEAK( 5 MICRO PULSE WIDTH; 1.25% DUTY CYCLE)


TEMPERATURE COEFFICIENT: < 0.0004 dB/dB/°C

STANDARD NOMINAL VALUES AND DEVIATIONS:

	$ACCURACY\pmdB$		
ATTENUATION (dB)	DC - 18 GHZ	18 - 40 GHZ	
3, 6, 10, 20, 30	+/- 1.0	+/- 1.75	

## MAXIUM VSWR:

FREQUENCY(GHZ)	VSWR	
DC - 18	1.25	
18 - 40	1.40	

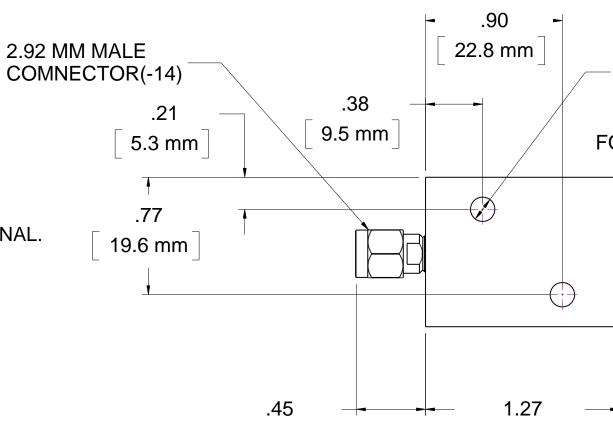

## CONNECTORS: 2.92MM (MALE/FEMALE) CONNECTORS-MATE NONDESTRUCTIVELY

32.3 mm

## CONTRUCTION: BLACK ANODIZED ALUMINUM ALLOY BODY, STAINLESS STEEL

WEIGHT: TBD (g / lbs)

11.5 mm

## NOTE: DIMENSIONS ARE GIVEN IN INCHES [MM] AND ARE NOMINAL, UNLESS OTHERWISE SPECIFIED.

APPLICATION		DIMENSIONS IN INCHES		DATE 8/10/18
USED ON	NEXT ASSY	3 PLCS +/003 2 PLCS +/01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	CHECKED	0/10/10
WA76B				
			QA	
		MAT'L: N/A	MFG	
		FINISH: N/A	APPROVED	
			DMH	8/13/1

PROPERTY OF INVISION INDUSTRIES, INC. COMPANY CONFIDENTIAL

