



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.15:1 MAX
PIM; 160dbc typ for 2 carriers @ 20W

MECHANICAL

MATERIALS 7/16 BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACTS SI PLATING
RECOMMENDED TORQUE 7-16 221 IN-LBS
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL PER DIN 47223
OPERATING TEMP: -45 TO +80 DEG C

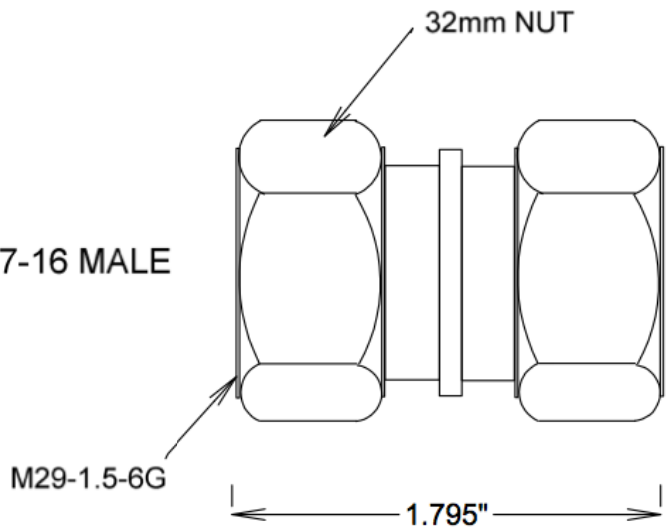

DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN D. HEFT	DATE 1/24/11	WEINSCHEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879			
	CHECKED		ADAPTER, 7/16 DIN MALE TO MALE WA1516-88			
	QA					
	MFG		SIZE B	FSCM NO. 0H3E9	DWG NO.	REV
MAT'L: SEE NOTES	APPROVED		SCALE NONE		SHEET 1 OF 1	
FINISH: SEE NOTES						

