



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED


SPECIFICATIONS

ELECTRICAL
50 OHMS
VSWR 1.25:1 MAX @ 34.5 GHZ
FREQUENCY: 0-34.5 GHZ

MECHANICAL
500 CYCLES MIN
4.0 INCH-OUNCES MIN CONTACT TORQUE
8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
-65 DEG C TO +85 DEG C
CORROSION: MIL-STD 202
VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL
BODY: SST ASTM A484 / A582
BeCu ATSM-B-196
PASSIVATED ASTM A380
CENTER CONTACTS Au PLATED
MIL-G-45204

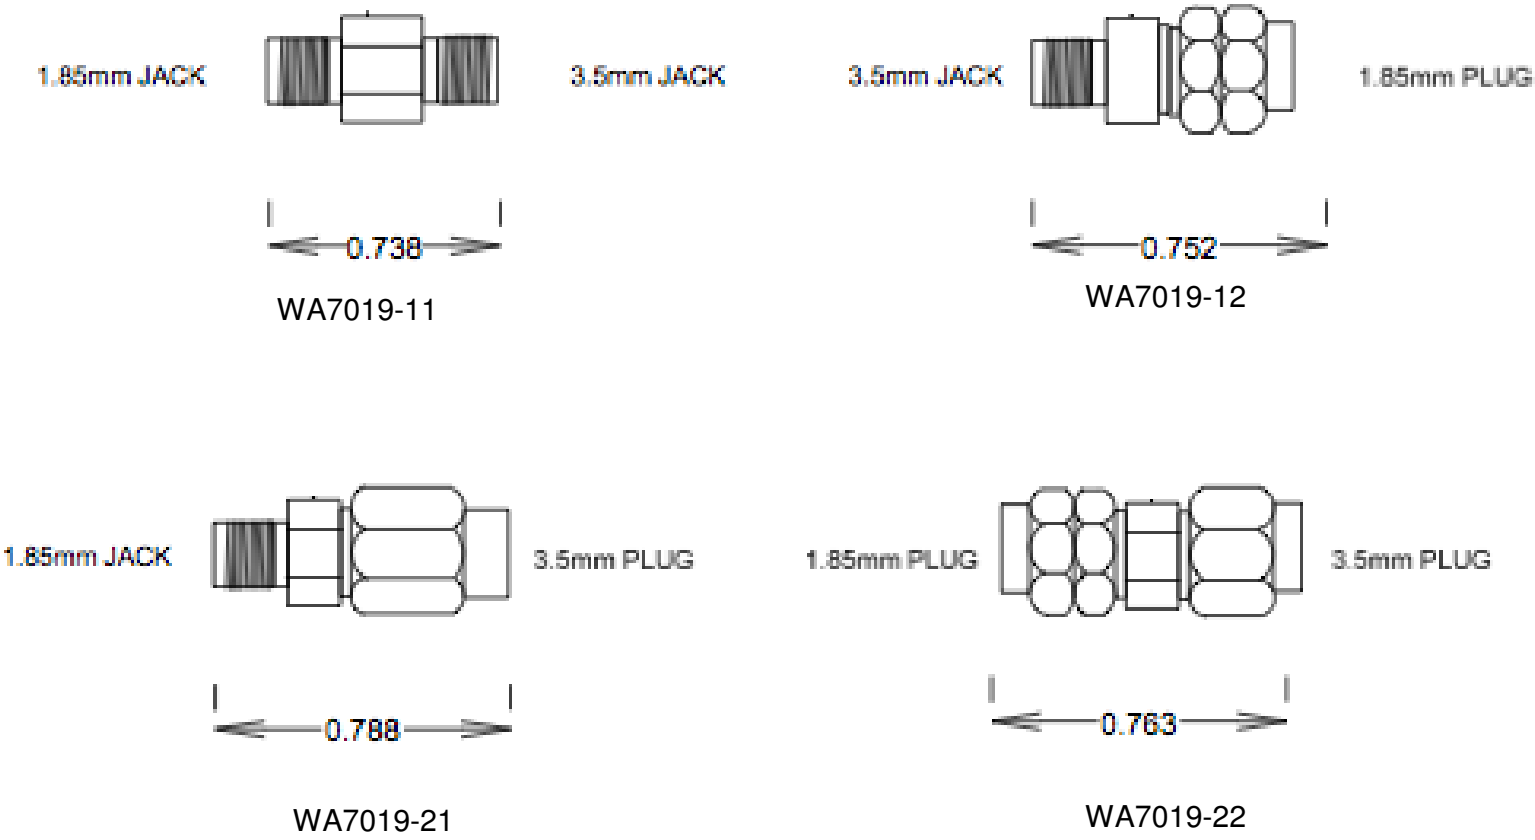

DIMENSIONS IN INCHES 3 PLCS +/- .003 2 PLCS +/- .01 FRACTIONS +/- 1/64 ANGLES +/- 1/2 DEG UNLESS OTHERWISE SPECIFIED	DRAWN D. HEFT	DATE 5/7/11	WEINSCHEL ASSOCIATES 19212 ORBIT DRIVE GAITHERSBURG, MD 20879		
	CHECKED				
	QA		ADAPTER, 3.5mm - 1.85mm WA7019		
	MFG				
MAT'L: SEE NOTES	APPROVED		SIZE B	FSCM NO. 0H3E9	DWG NO.
FINISH: SEE NOTES			SCALE NONE		REV
			SHEET 1 OF 1		

